EXPERT NEW

Haier

2,0 kW
2,5 kW
3,5 kW
5,0 kW
7,1 kW





Standard HQ-HJ

Easy Installation | I Feel | Self Clean | Coanda Plus | Eco Sensor | Easy to Disassemble | 2-Way Piping Design | UVC Pro | Integrated Wi-Fi Control

- Easy Installation
- I Feel
- Self-Clean (Only Dual)
- Eco Sensor
- On-Off Card
- 2-Way Pipe Design
- UVC Pro
- Integrated Wi-Fi control

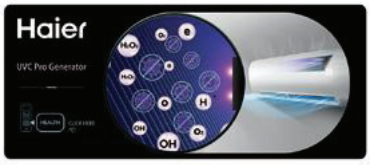

INDOOR UNIT	Model		AS20XCAHRA	AS25XCAHRA	AS35XCAHRA	AS50XCAHRA	AS71XCAHRA
			AS20XCAHRA-MB	AS25XCAHRA-MB	AS35XCAHRA-MB	AS50XCAHRA-MB	AS71XCAHRA-MB
Performance data							
Output power - COOLING	nom (min-max)	kW	2,00	2,80 (0,80-3,20)	3,50 (1,00-4,00)	5,00 (1,40-5,50)	6,2(2,20-7,0)
Output power - HEATING	nom (min-max)	kW	2,50	3,20 (0,80-4,20)	4,20 (1,00-5,20)	5,60 (1,70-6,20)	6,8(2,40-7,80)
Power supply		Ph/V/Hz	1/220~240/50	1/220~240/50	1/220~240/50	1/220-240/50	1/220-240/50
Interconnection cable			4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0
Treated air volume	H	m3/h	730	730	800	880	920
Indoor Unit							
High sound power - COOLING		dB	56	56	57	60	65
High sound power - HEATING		dB	56	56	57	60	65
Sound pressure - COOLING		dB(A)	39/32/25/16	39/32/25/16	40/33/26/17	45/37/29/20	47/45/37/29
Sound pressure -HEATING		dB(A)	39/32/25/16	39/32/25/16	40/33/26/17	45/37/29/20	47/45/37/29
Net dimensions	WxDxH	mm	895x313x236	895x313x236	895x313x236	895x313x236	895x236x313
Packaging dimensions	WxDxH	mm	964x386x316	964x386x316	964x386x316	964x386x316	949x298x371
Net/gross weight		kg	11,3/14,0	11,3/14,0	11,3/14,0	11,6/14,2	12,4/14,8
Installation data							
Liquid pipe	Ø	mm	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	9,52 (3/8)
Gas pipe	Ø	mm	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)	12,70 (1/2)	15,88 (5/8)
Control							
Standard	Remote control		HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ

AS20 - AS25 - AS35 - AS50 - AS71

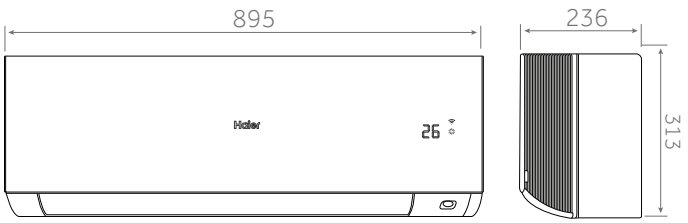

The data in this catalogue is purely indicative as the data may vary. Please be advised to check the accuracy of the data with the supplier before purchasing products.